

Model BEAM1224(S) Single-ended Reflected Type Beam Smoke Detector




Models Available

| | |
|-----------|---|
| BEAM1224 | 4 wire conventional beam smoke detector with 8" reflector |
| BEAM1224S | 4 wire conventional beam smoke detector with 8" reflector and integral sensitivity test |

Accessories

| | |
|-----------|--|
| BEAMLRK | Long range accessory kit (3) additional reflectors (Required for applications in excess of 230 ft. [70m]) |
| BEAMMMK | Multi-mount kit (Provides ceiling or wall mount capability with increased angular adjustment for either the beam or the reflector) |
| BEAMSMK | Surface mount kit |
| RTS451 | Remote test station used to initiate the NFPA sensitivity test function |
| RTS451KEY | Remote test station with key lock |

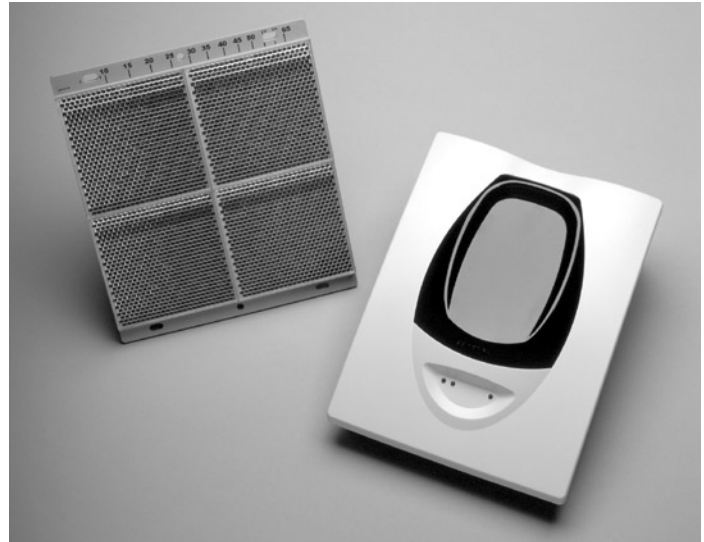

Product Overview

- 16 to 328 foot protection range**
- Single-ended, reflective design**
- User friendly alignment procedure**
- 6 user selectable sensitivity levels**
- Optional integral NFPA 72 sensitivity test feature**
- Removable plug-in terminal blocks**
- Digital display for easy alignment**
- Built-in automatic gain control compensates for signal deterioration from dust build-up**
- Remote test station optional**
- Paintable cover**
- Easiest alignment in the industry**

System Sensor Model BEAM1224 is a 4-wire conventional projected beam smoke detector. It is uniquely suited for protecting open areas with high ceilings where other methods of smoke detection are difficult to install and maintain. It is to be used with UL Listed compatible control panels only. Installation of the single-ended reflective design is much easier than the dual-ended projected beam detectors. Alignment is quickly accomplished via an optical sight and a 2-digit signal strength meter incorporated into the product. Listed for operation from -22°F to 131°F, BEAM1224 can be used in open area applications to provide early warning in environments where temperature extremes exceed the capability of other types of smoke detection.

BEAM1224 consists of a transmitter/receiver unit and a reflector. When smoke enters the area between the unit and the reflector it causes a reduction in the signal and, when the smoke level reaches the predetermined threshold, an alarm is activated.

BEAM1224 has four standard sensitivity selections along with two Acclimate settings. When either of the two Acclimate settings are selected the detector will automatically adjust its sensitivity using advanced software algorithms to select the optimum sensitivity for the specific environment.

BEAM1224S is equipped with an integral sensitivity test feature that consists of a test filter attached to a servo motor inside the detector optics. Using the remote test station RTS451, the motor is activated and moves the filter in the pathway of the light beam, thereby testing detector sensitivity. This integral sensitivity test feature allows the user to quickly and easily meet the annual maintenance and test requirements of NFPA 72.



Operational Specifications

Protection Range

16 ft. to 328 ft.
(5m to 100m)

Adjustment Angle

+/- 10 Degrees horizontal & vertical
(The optics move independent of the unit)

Sensitivity Levels

Level 1 – 25%
Level 2 – 30%
Level 3 – 40%
Level 4 – 50%
Acclimate Level 1 – 30-50%
Acclimate Level 2 – 40-50%

Fault Condition (Trouble)

96% or more obscuration blockage
In alignment mode
Improper initial alignment
Self-compensation limit reached

Alignment Aid

Optical gunsight
Integral signal strength indication
2-digit display

Alarm Indicator

Local red LED and remote alarm

Trouble Indicator

Local yellow LED and remote trouble

Normal Indicator

Local flashing green LED

Test/Reset Features

Integral Sensitivity Test Filter
(BEAM1224S only)

Sensitivity filter

(Incremental scale on reflector)

Local alarm test switch

Local alarm reset switch

Remote test and reset switch
(Compatible with RTS451 and
RTS451KEY test station)

Smoke Detector Spacing

On smooth ceilings, 30-60 feet between projected beams and not more than one-half that spacing between a projected beam and a sidewall. Other spacing may be used depending on ceiling height, airflow characteristics, and response requirements. See NFPA 72.

Environmental Specifications

Temperature

-22°F to 131°F (-30°C to 55°C)

Humidity

10-93% RH Noncondensing

Electrical Specifications

Voltage

10.2 to 32 VDC (BEAM1224)

15 to 32 VDC (BEAM1224S)

AVG. Standby Current (24 VDC)

17mA Max

AVG. Current During Testing

500mA Max

AVG. Alarm Current (24 VDC)

38.5mA Max

AVG. Fault Current (24 VDC)

8.5mA Max

AVG. Alignment Mode Current (24 VDC)

28mA Max

Mechanical Specifications

Detector Dimensions


10"H x 7.5"W x 3.3"D
(254mmH x 191mmW x 84mmD)

Reflector Dimensions (16' to 230')

7.9" x 9.1" (200 x 230mm)


Reflector Dimensions for (beyond 230')

15.7" x 18.1" (400 x 460mm)

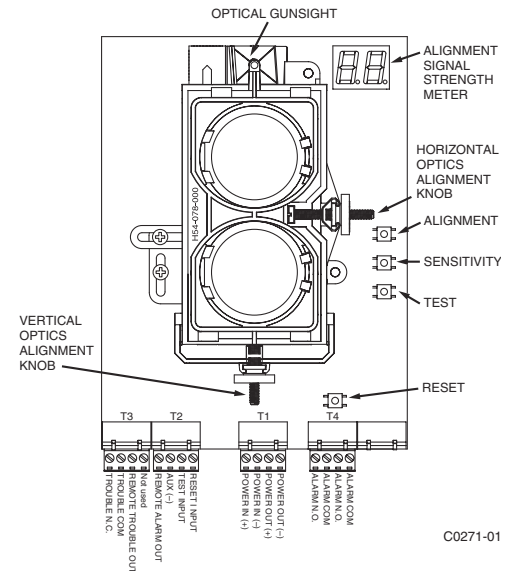

C0271-01

Activated Test Feature (BEAM1224S only)

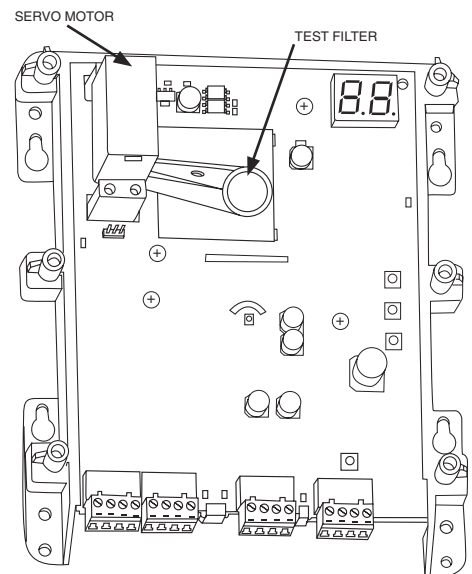

RTS451



BEAMMMK
(detector and surface mount kit not included)

System Sensor Sales and Service

System Sensor Headquarters

3825 Ohio Avenue
St. Charles, IL 60174
Ph: 800/SENSOR2
Fx: 630/377-6495
Documents-on-Demand
800/736-7672 x3
www.systemsensor.com

System Sensor Canada

Ph: 905.812.0767
Fx: 905.812.0771

System Sensor Europe

Ph: 44.1403.891920
Fx: 44.1403.891921

System Sensor in China

Ph: 86.29.524.6253
Fx: 86.29.524.6259

System Sensor in Singapore

Ph: 65.6273.2230
Fx: 65.6273.2610

System Sensor – Far East

Ph: 85.22.191.9003
Fx: 85.22.736.6580

System Sensor – Australia

Ph: 613.54.281.142
Fx: 613.54.281.172

System Sensor – India

Ph: 91.124.237.1770 x.2700
Fx: 91.124.237.3118

System Sensor – Russia

Ph: 70.95.937.7982
Fx: 70.95.937.7983