


**SELF-CONTAINED EXIT SIGNAGE
BOX TYPE / WALL MOUNTING**

TECHNICAL DATA

- Mode of Operation:** Maintained / Non-Maintained.
- Voltage:** A/C 220V~ 240V 50/60 Hz
- Power Source:** Maintenance-Free Sealed Nickel Cadmium Battery, 4.8V-1.2AH .
- Operating Current:** 90 mA (Nominal).
- Light Source Used:** 1 x 10 Watt Fluorescent Tube.
- Charging Regulator:** Fully Automatic Solid-State Electronics Constant-Current Limiting with Trickle Charge Facility. Provide High Reliability.
- Operating Temp.:** -10 °C to 60 °C .
- Indicator:** Red L.E.D. "On" Indicates Charging.
- Test Facility:** Equipped with a Push-Off Test Switch to Simulate Power Failure.
- Operating Time:** >2 Hours.
- Construction:** Electro-Galvanized Steel Casing of High Reflectance Finish with High Grade Epoxy Powder Coating.
- Weight:** < 3.5 Kgs.
- Compliance:** Singapore Standards CP-19 , IEC-598-2-22 .
- Dimensions in mm.:**

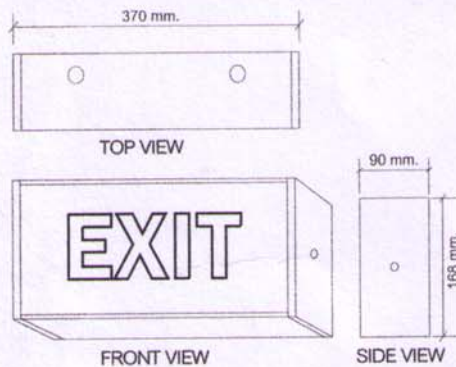

Specifications are subject to change without prior notice.